

KINETIC AIR/VACUUM VALVE

6" and 8" Flanged Inlet Size
Standard Outlet Cowl



FIG. 930

AIR/VACUUM VALVE WITH OUTLET COWL

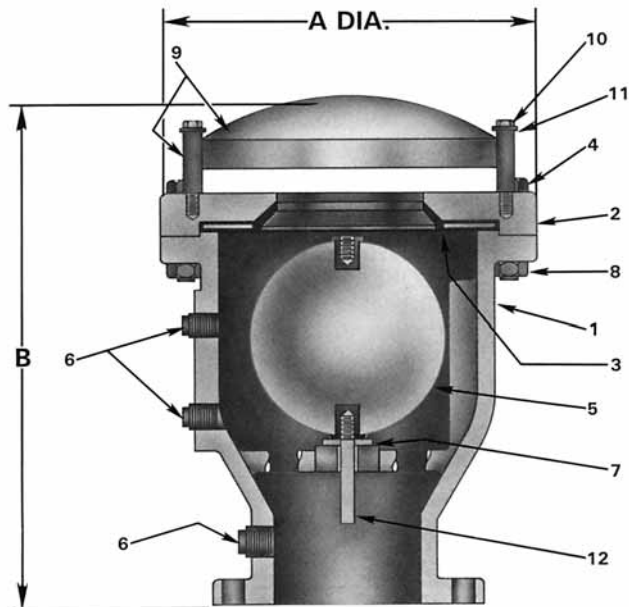


FIG. 930

Flange Dimension Per ANSI B16.1
Class 125 (CL.250 Optional)

GENERAL DIMENSIONS

VALVE SIZE	A (DIAMETER)	B (HEIGHT)	WEIGHT (LBS.)
6"	15-1/4"	21"	175
8"	19"	25-1/2"	335

ENGINEERING SPECIFICATION

The Air/Vacuum Valve shall employ the KINETIC principle to automatically exhaust large quantities of air during the filling of a pipeline or vessel and to allow air to re-enter during draining or when a negative pressure occurs. Valves shall be designed to exhaust air at up to sonic velocity without blowing shut.

The inlet shall be the nominal size of the valve and the outlet shall be the same size as the inlet. The float shall be spherical, be capable of withstanding a test pressure of 1000 psig and shall seal against a renewable resilient seat.

The body and cover shall be constructed of cast iron conforming to ASTM A126 Class B. The float shall be made of stainless steel. Unless otherwise specified, a protective cowl shall be provided on the outlet.


KINETIC Air/Vacuum Valves shall be as manufactured by GA Industries, Inc., their Figure 930 (formerly Figure GH21K-SO).

PARTS LIST

1. BODY - Cast Iron A126 Class B
2. COVER - Cast Iron A126 Class B
3. SEAT - Buna-N/Stainless Steel
4. COVER BOLTS - Steel Grade 2
5. FLOAT BALL - 316 Stainless Steel
6. PIPE PLUG - Steel (Commercial)
7. CUSHION - Buna-N
8. COVER NUTS - Steel Grade 2
9. COWL ASSEMBLY - Steel (Commercial)
10. COWL BOLTS - Steel Grade 2
11. COWL WASHER - Steel (Commercial)
12. FLOAT GUIDE - 316 Stainless Steel

ENGINEERING DATA

Kinetic Operating Principle

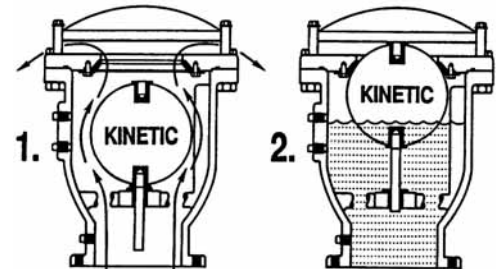

1. During the exhausting sequence, the air flowing around the buoy ball produces a resultant downward force which maintains the ball in the open position.
2. The buoyant force of the ball will seal the exhaust orifice when water reaches the ball.

Pressure Rating:

- CL.125 FLG Inlet Body rated to 200 psi WOG; tested to 300 psi.
- CL.250 FLG Inlet Body rated to 400 psi WOG; tested to 600 psi.
- Ball Float tested to 1000 psi.

Connections:

- CL.125 FLG Inlet x Outlet Cowl - Standard
- CL.250 FLG Inlet x Outlet Cowl - Optional

Options:

- For Optional CL.125 FLG Outlet, specify Fig. 930-J.

FOR SIZING AND LOCATING,
SEE PAGES 36-37.